




1210 AMERICAN BLVD.
WEST CHESTER, PA 19380
PHONE 800-232-5060

TECHNICAL DATA SHEET

#54 SS/SS POP RIVET DOME HD MILL FINISH - PRDH3040

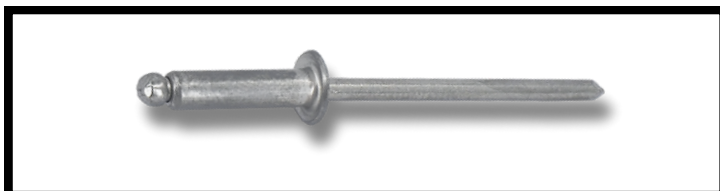

***PAINTING AVAILABLE**

SPECIFICATIONS

Grip Range	.188 - .250
Rivet Length	.425
Head Diameter	.312
Head Height	.050
Mandrel Diameter	.095
Dome Diameter	5/32"
Hole Size (Drill #)	.160 - .164 (#20)

CAPACITIES

Strength(Lbs./Ultimate):	
Shear	650
Tensile	820

CONFORMANCE:

Manufactured per IFI-114 Standards

INSTALLATION:

#20 High Speed Steel Drill Bit Required. Can be installed with battery powered or manual rivet installation tools

DISTRIBUTED BY:

Fastener Systems Inc. 1210 American Blvd., West Chester, PA 19380

Disclaimer: All test results are based on testing done in a laboratory. Specific job conditions should be taken into consideration when specifying the proper fastener. Because applications vary, FSI assumes no liability for the use of this information.